



DB40-G Firmware Upgrade Instruction

Step 1: Connect the DB40-G to the power supply first, then connect the radio to the computer using a programming cable;

Note: When connecting the programming cable, please open the Device Manager and navigate to Ports (COM & LPT). Locate and make a note of the Port name (specific to your computer). This Port will be selected in step 3.

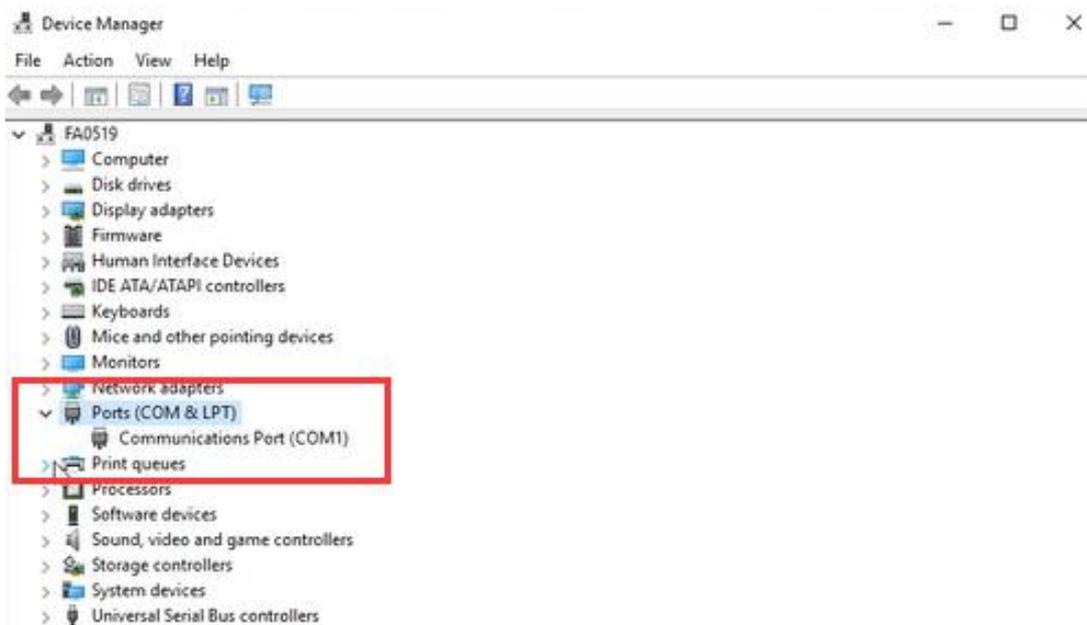

Step 2: Open the upgrade software CodeUp 1.11.exe (under Upgrade Software folder)

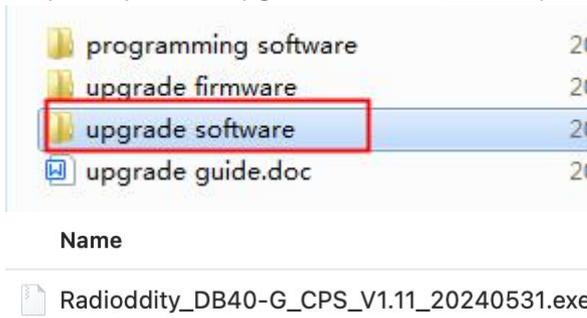


Step 3: Select the model name, firmware and the port.

Model: CB575P


Firmware File: Radioddity_DB40-G_Firmware_V1_20240531.nanfone (under Upgrade Firmware folder)

Port: Specific to your computer (see the step 1)

Radioddity DB40-G Firmware Upgrade Instruction

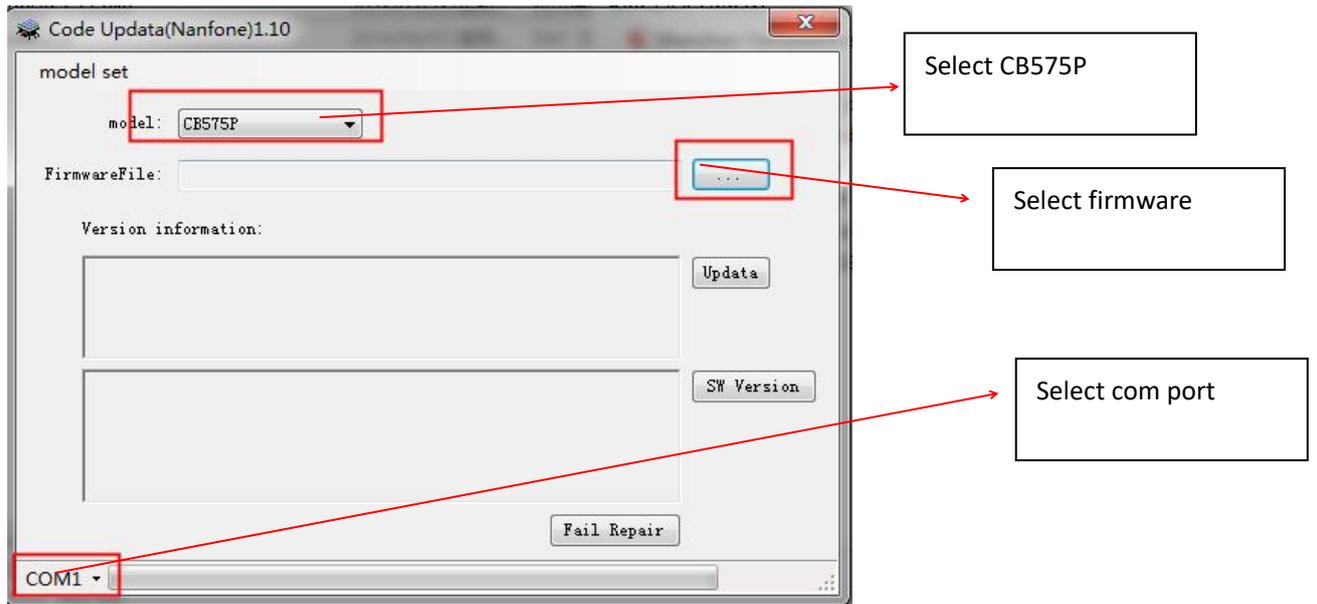

Step 4: Click "Updata" and start upgrading.

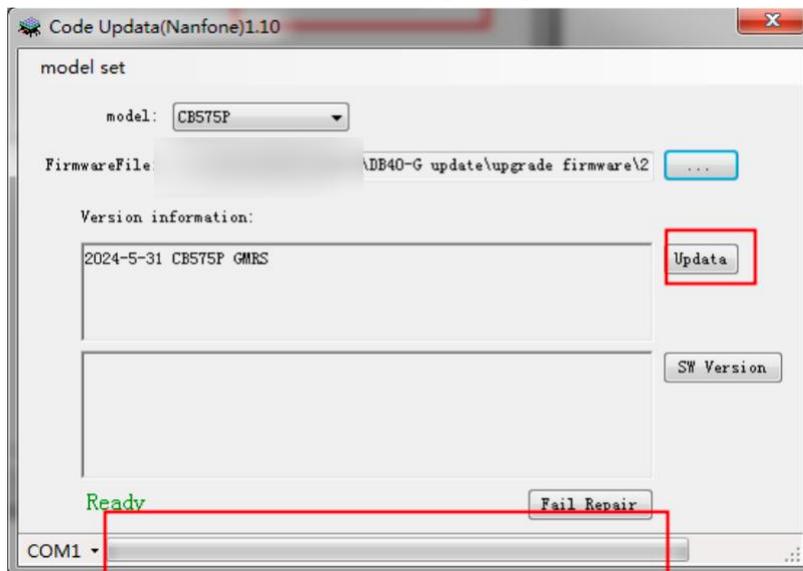

Radioddity DB40-G Firmware Upgrade Instruction

Please attention!

1. If the upgrade fails, please do not shut down or disconnect the power supply. Please click Fail Repair to re-upgrade. Otherwise, the radio will not be able to power on! !

2. When the upgrade is completed, shut down the computer and press "SQ+SCAN+Power On" on the panel at the same time to reset. "REST 12" will be displayed, indicating that the software upgrade is successful.