

Certification  
Issued Under the Authority of the  
Federal Communications Commission

By:

PHOENIX TESTLAB GmbH  
Koenigswinkel 10  
32825 Blomberg,  
Germany

Date of Grant: 07/17/2024

Application Dated: 07/17/2024

Qixiang Electron Science& Technology Co., Ltd  
Qixiang Building, Tangxi Industrial Zone, Luojiang  
Quanzhou, Fujian, 362011  
China

Attention: Ken Xu

NOT TRANSFERABLE

EQUIPMENT AUTHORIZATION is hereby issued to the named GRANTEE, and is  
VALID ONLY for the equipment identified hereon for use under the Commission's  
Rules and Regulations listed below.

FCC IDENTIFIER: T4K-900PRO  
Name of Grantee: Qixiang Electron Science& Technology Co.,  
Ltd  
Equipment Class: Scanning Receiver  
Notes: CB Radio

Grant Notes


FCC Rule Parts  
15B

Frequency  
Range (MHZ)  
26.965 - 27.405

Output  
Watts

Frequency  
Tolerance

Emission  
Designator

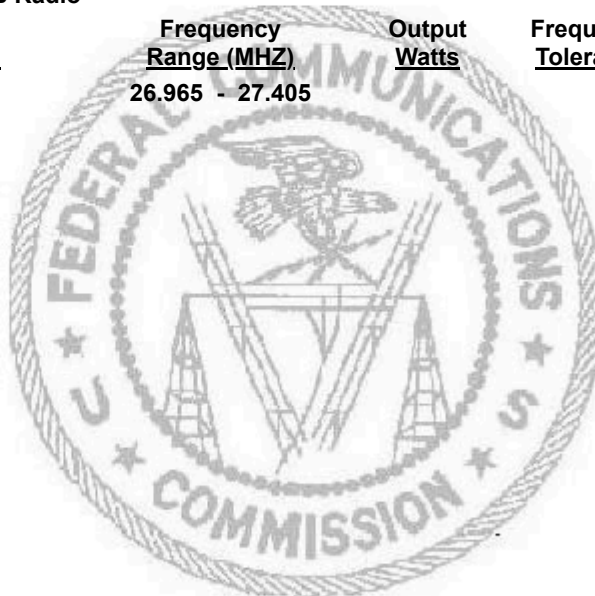

Certification  
Issued Under the Authority of the  
Federal Communications Commission  
By:

PHOENIX TESTLAB GmbH  
Koenigswinkel 10  
32825 Blomberg,  
Germany

Date of Grant: 07/17/2024

Application Dated: 07/17/2024

Qixiang Electron Science& Technology Co., Ltd  
Qixiang Building, Tangxi Industrial Zone, Luojiang  
Quanzhou, Fujian, 362011  
China

Attention: Ken Xu

NOT TRANSFERABLE

EQUIPMENT AUTHORIZATION is hereby issued to the named GRANTEE, and is VALID ONLY for the equipment identified hereon for use under the Commission's Rules and Regulations listed below.

FCC IDENTIFIER: T4K-900PRO  
Name of Grantee: Qixiang Electron Science& Technology Co., Ltd  
Equipment Class: Licensed Non-Broadcast Station Transmitter  
Notes: CB Radio

| <u>Grant Notes</u> | <u>FCC Rule Parts</u> | <u>Frequency Range (MHZ)</u> | <u>Output Watts</u> | <u>Frequency Tolerance</u> | <u>Emission Designator</u> |
|--------------------|-----------------------|------------------------------|---------------------|----------------------------|----------------------------|
|                    | 95D                   | 26.965 - 27.405              | 3.981               | 1.098 PM                   | 5K54A3E                    |
|                    | 95D                   | 26.965 - 27.405              | 3.981               | 1.077 PM                   | 5K96F3E                    |

Output power listed is conducted. The ant gain used should be 0dBi as typical, max is 3dBi, RF exposure compliance was evaluated using a 3 dBi external antenna as described in this filing. The antenna used with this transmitter must be installed to provide a minimum separation distance of at least 51.5 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter, except in accordance with FCC multi-transmitter product procedures. End-users must be provided with operating procedures for satisfying RF exposure compliance.

