

# Radioddity K1 Bluetooth headset



## Unpack and Check Accessories

Please remove the product from the pack box carefully, please check whether the box contains all items listed in the table below before the pack box. If any items is lost or damaged during delivery, please contact seller.

### All Items

| Ite                             | Unit | Quantity |
|---------------------------------|------|----------|
| Advanced Bluetooth Headset      | PCS  | 1        |
| Two Way Radio Bluetooth Adapter | PCS  | 1        |
| Silicone Ear Tips               | PCS  | 2        |
| Charging Cable                  | PCS  | 1        |
| User Manual                     | PCS  | 1        |



## Product description

### Walkie talkie bluetooth headset(Enhanced version)

This product can adapt two devices at the same time. It is equipped with built-in walkie-talkie dedicated wireless "PTT" button and environmental noise reduction function. It achieves simultaneous dual standby and radio priority calls when the bluetooth headset is in a mobile phone call or multimedia audio playing mode. When the two way radio receives a signal, it enters the intercom call state automatically. When intercom call ends, it returns to multimedia mode automatically after 8 seconds.

When a bluetooth headset is connected to a walkie-talkie and it needs to be connected with a mobile phone at the same time, please turn off the bluetooth headset, pair the bluetooth headset and the mobile phone. When the bluetooth headset connects with the mobile phone successfully, restart the bluetooth headset. It will connect the walkie-talkie and the mobile phone automatically.


- Walkie talkie "PTT" button (📞)
- On/Off button (🔘)
  - Long press 2 seconds to turn on, then long press 2 seconds to turn off.
  - Long press 6 seconds to enter bluetooth pairing.
  - Press to pause and continue when you are listening to music. (🎵)
  - Press to answer the phone call. Then press again to end the call. (📞)
- Volume up button
  - Press the button to turn up the volume.
  - Long press 2 seconds to previous song.
- Volume down button
  - Press the button to turn down the volume. ①
  - Long press 2 seconds to next song.
- Headset earphone
- USB charging port
- Indicator
- More functions
  - Noise reduction: press Power and Volumn + button (②+④) simultaneously.
  - Language switching: press Power and Volumn - button (②+③) simultaneously.
  - Pairing elimination: press Volumn + and Volumn - button (②+③) simultaneously. You will hear beep.



## Walkie -Talkie wireless adapter

### Two Way Radio Bluetooth Adapter Pairing

- On/Off
  - Long press Multi-function button for 2 seconds, blue light glints, power on. Then long press Multi-function button for 3 seconds, red light glints, power off.
- Pairing
  - When the bluetooth adapter is TURNED OFF, long press the Multi-function button for about 7 seconds to enter pairing status. ( Red and blue light glint alternately. )
- Put the wireless PTT key and the bluetooth adapter together. Press the wireless PTT key's button for about 1 second. The Bluetooth adapter's red light disappear. It Means the wireless PTT key is paired with bluetooth adapter successfully.
- Put the bluetooth adapter and the bluetooth headset together(both are red and blue lights glint alternately). Wait for about 40 seconds(first pairing). When their alternant red and blue lights disappear and only blue light glints. It means the bluetooth earpiece is paired with bluetooth adapter successfully.



## Indicator Light

- Blue light flashes slowly:** power on, in standby mode.
- Blue light flashes fast :** the bluetooth connection is interrupted, please check whether the bluetooth earphone is turned on or has exceeded the bluetooth connection distance
- Red light on:** device is transmitting. When it is over, red light off.
- Low battery tips:** In standby mode, the red light flashes means low battery, please charge in time.

## Installation/ Removal

- Installation:** Insert the adapter into the intercom port. (figure 1)
- Removal :** unplug the adapter from the intercom port.(figure 2)




figure 1





figure 2

## Wireless PTT key

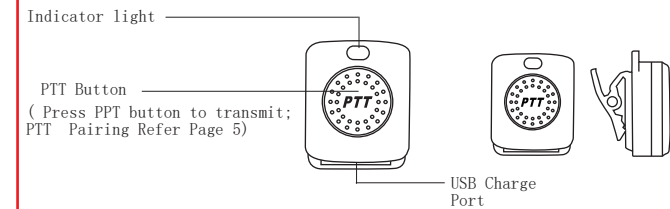

## Charging Instructions:

This product uses MINI USB charging port. It can be charged by standard DC 5V power supply(computer's USB port, power bank).When it is charging--red light on. If it is full charged-- red light off.